

# ELEVATION CERTIFICATE

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

**ATTENTION:** Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION		FOR INSURANCE COMPANY USE	
BUILDING OWNER'S NAME <u>Bret Moore</u>		POLICY NUMBER	
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER <u>1134 Glen Moore</u>		COMPANY NAIC NUMBER	
OTHER DESCRIPTION (Lot and Block Numbers, etc.) <u>Lot 205 FOREST GLEN Phase II</u>			
CITY <u>Central Point, OR</u>		STATE <u>OR</u>	ZIP CODE <u>97502</u>

### SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION

Provide the following from the proper FIRM (See Instructions):

1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)
<u>41009Z</u>	<u>0001</u>	<u>C</u>	<u>1-19-1982</u>	<u>A</u>	<u>1279.2</u>

7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE):  NGVD '29  Other (describe on back)
8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: 1279.2 feet NGVD (or other FIRM datum—see Section B, Item 7).

### SECTION C BUILDING ELEVATION INFORMATION

- Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level 9.
- (a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of 1280.4 feet NGVD (or other FIRM datum—see Section B, Item 7).  
(b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of            feet NGVD (or other FIRM datum—see Section B, Item 7).  
(c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is            feet above  or below  (check one) the highest grade adjacent to the building.  
(d). FIRM Zone AO. The floor used as the reference level from the selected diagram is            feet above  or below  (check one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance?  Yes  No  Unknown
- Indicate the elevation datum system used in determining the above reference level elevations:  NGVD '29  Other (describe under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.)
- Elevation reference mark used appears on FIRM:  Yes  No (See Instructions on Page 4)
- The reference level elevation is based on:  actual construction  construction drawings  
(NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)
- The elevation of the lowest grade immediately adjacent to the building is: 1277.0 feet NGVD (or other FIRM datum—see Section B, Item 7).

### SECTION D COMMUNITY INFORMATION

- If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:            feet NGVD (or other FIRM datum—see Section B, Item 7).
- Date of the start of construction or substantial improvement

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME: Herbert A Farber LICENSE NUMBER (or Affix Seal): \_\_\_\_\_

TITLE: President COMPANY NAME: Farber & Sons Inc

ADDRESS: 120 mistletoe CITY: Medford STATE: OR ZIP: 97501

SIGNATURE: [Signature] DATE: 8-3-97 PHONE: (541) 776-0846

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.


COMMENTS: Base on City of Central Point Flood Study Elew 1929/56 NAUD, unable to certify wall type.

RENEWAL DATE 12-31-97

REGISTERED PROFESSIONAL LAND SURVEYOR

[Signature]

OREGON JULY 26, 1985 HERBERT A. FARBER 2189

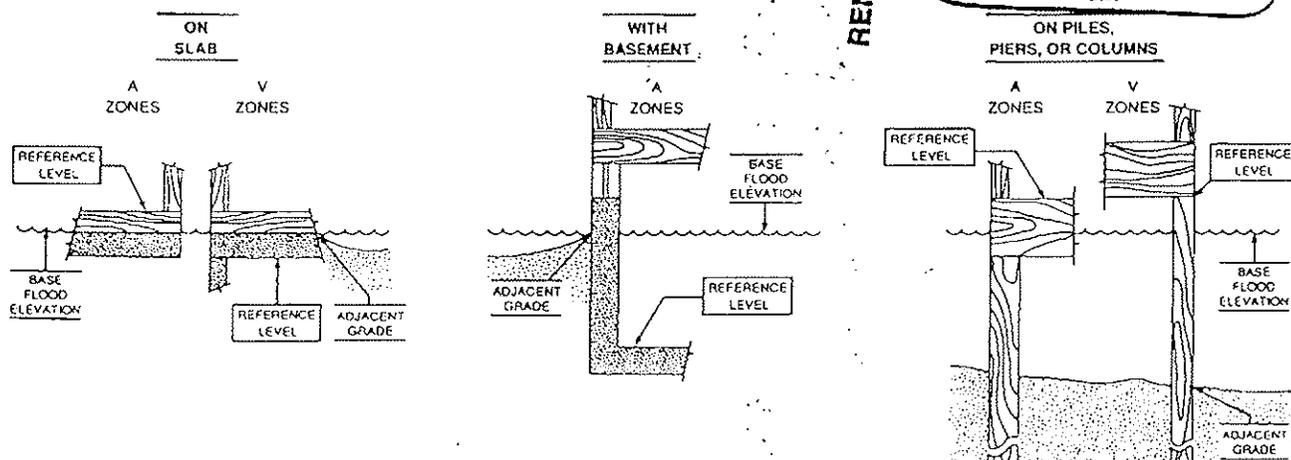

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones. Elevations for all A Zones should be measured at the top of the reference level floor. Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.

# CITY OF CENTRAL POINT PUBLIC WORKS DEPT

## SITE PLAN ELEVATION INFORMATION

IN ACCORDANCE WITH CPMC 8.24 THE FOLLOWING INFORMATION IS TO BE PROVIDED AND SUBMITTED WITH ANY APPLICATION FOR THE CONSTRUCTION OF ANY STRUCTURES LOCATED WITHIN DESIGNATED FLOOD HAZARD AREAS.

Lot 205 Forest Glen Phase IV

1134 Glen Glen

JOB ADDRESS-

RANGE-SECTION MAP PAGE

Whittle

CONTRACTORS NAME

THE BASE FLOOD ELEVATION FOR THIS LOT IS INDICATED AS 1279<sup>2</sup> ft.

A BENCH MARK INDICATING THIS REFERENCE LEVEL IS LOCATED AT:

Brass Cap Sly of INTERSECT white Chapel & Glen Grove ELEV 1277<sup>32</sup>

THE FINISHED FLOOR LEVEL SHALL BE LOCATED AT 1280<sup>2</sup> ft.

BY SIGNATURE THE CONTRACTOR HEREBY AGREES TO CONSTRUCT THE FINISHED FLOOR LEVEL AT, OR GREATER THAN, THE ELEVATION AS INDICATED ABOVE.

37 P.2

CONTRACTORS SIGNATURE

BB# NUMBER

DATE

PREPARED BY:

HERBERT A. FARBER PLS 2189

CERTIFIERS NAME

LISCENSE NUMBER

Pres.

Farber & Sons, INC

TITLE

COMPANY NAME

120 Mistletoe

Medford

OR

97501

ADDRESS

CITY

ST.

ZIP

Herbert A. Farber

6-10-97

SIGNATURE

DATE

38

38 N.A.

3.0.0